


MT1041 Single point load cell 10kg~100kg

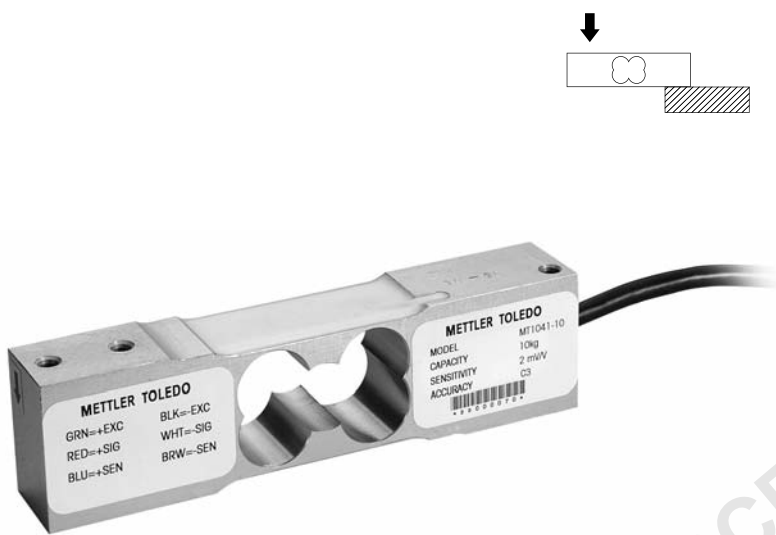

Features:

- Single point aluminum load cell
- OIML R60 C3 approved
- Protection class IP67
- Off center load compensated (OIML R76)
- Ideal for platform scales, packing and process weighing equipment
- II 2G ExibIIC T4
- II 2D ExibD21 IP66 T135°C

Specification

Rated capacity	kg	10,15,20,30,50,75,100
Rated output	mV/V	2 ± 0.2
Accuracy class		OIML R60 C3
Zero balance	%R.C.	≤ 10
Temp. Compensated range	°C	-10~+40
Operating temp. Range	°C	-20~+65
Input resistance	Ω	400 ± 10
Output resistance	Ω	350 ± 4
Insulation resistance	MΩ	≥ 5000(50V DC)
Recommended voltage	V(DC/AC)	5~15
Max. excit. voltage	V(DC/AC)	20
Safe overload	%R.C.	150
Ultimated overload	%R.C.	300
Protection class		IP67
Max. platform size	mm	400 x 400
Cable length	m	2

- 1) The combined maximum error due to nonlinearity, hysteresis and temperature effect on output, does not exceed the error limits to OIML-R60.
- 2) All relative errors specified refer to the output signal at nominal load.
- 3) ATEX APPROVED: See certificate for complete information.

