


Dimensions

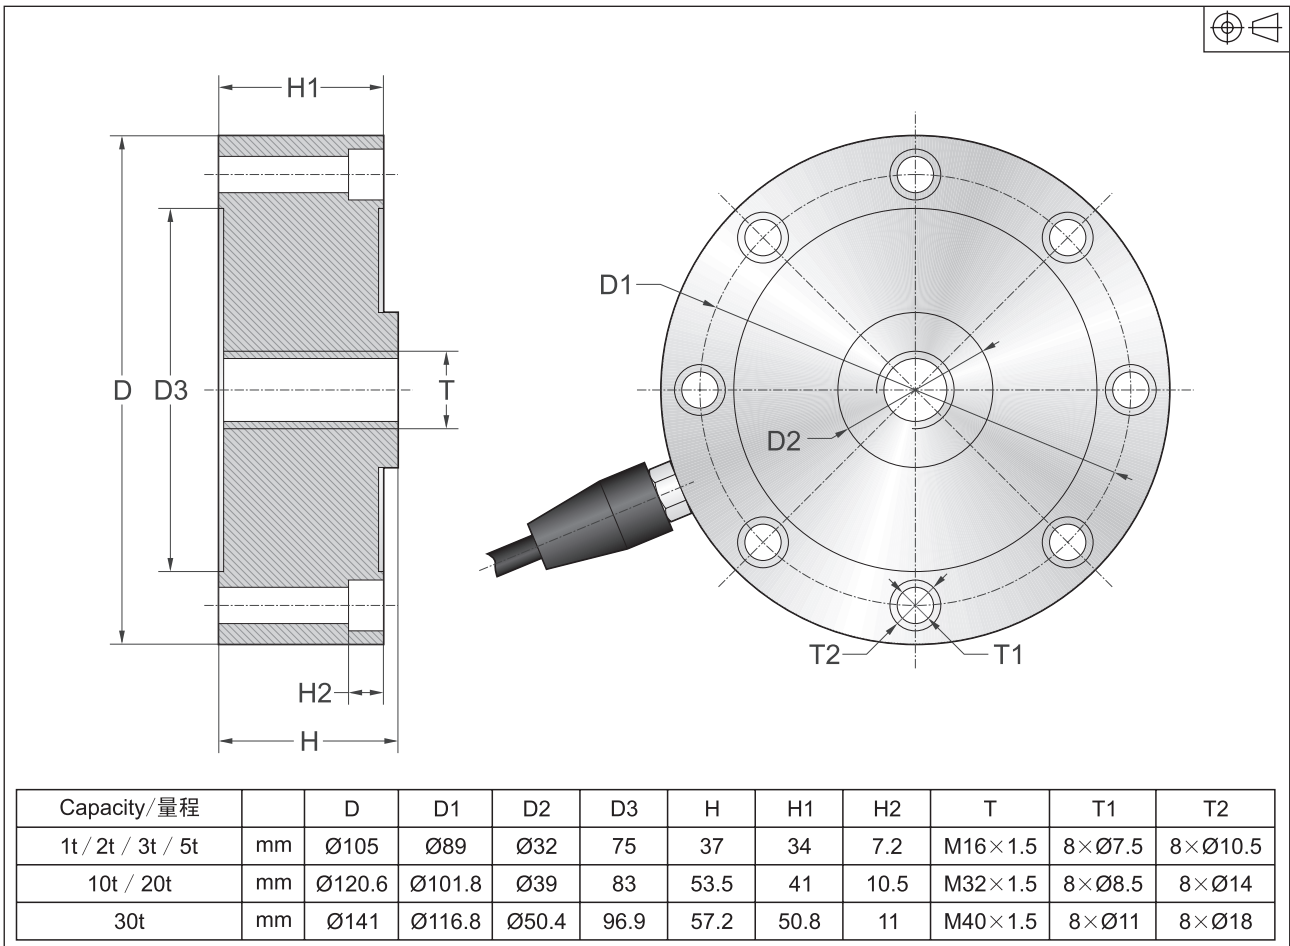

Specification

Rated Output		3.0mV/V ±0.25%
Zero Balance		±1% of rated output
Creep after 30 minutes		±0.03% of rated output
Nonlinearity		±0.03% of rated output
Hysteresis		±0.03% of rated output
Repeatability		±0.03% of rated output
Temp. effect on output		/°C
Temp. effect on zero		/°C
Safe Temp. Range		-10°C to + 70°C
Temp. Compensated		-10°C to + 40°C
Safe Overload		150%
Input Impedance		
Output Impedance		
Insulation Resistance		(50V DC)
Rated Excitation		10V DC/AC
Maximum Excitation		15V DC/AC
Cable Length		600cm/1000cm
Cable Color Code		Red(+ E) Black(- E) Green(+ S) White(- S)