

# 1500SL



1500SL

### 功能和优点

- 1500kN / 300,000lbf
- 
- 
- 

Horizon

### 可选项和附件


- / /
- 914mm/36in
- 1

1

/ LVDT

• Tinius Olsen Horizon

• 1

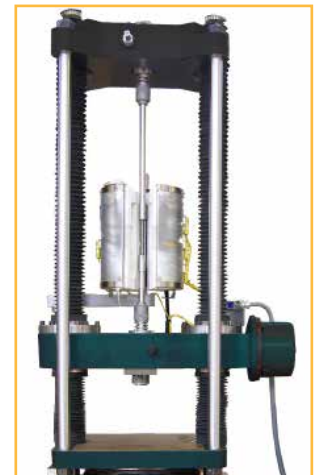

Tinius Olsen Horizon





	kN	1500
	kg	150,000
	lbf	300,000
		2
		4
	TO	# E6 30 27
	TO	# 00 4C 45
	ABS	
	Cal	# 11 18 20
	mm	610 566
	in	24 22
	mm	229
	in	9
	mm	959
	in	38
	kN/mm	1,700
	klbf/in	9,500
	mm	2445
	in	96
	mm	940
	in	37
	mm	851
	in	33.5
	kg	5444
	lb	12,000
		305, 610, 914mm 12, 24 36 in
		305, 610, 914mm 12, 24 36 in
/		
2		68db
		168 MHz
PC		1000 Hz
--		4

--		3
		v4.0 + A 2DP, LE, EDR
		USB
		TO HMC, Proterm, Horizon
		8388608 1
		+/- 0.2%
		0.2% - 100%
	+/- 0.5%	ISO 7500-1 ASTM E4
		1000Hz
		0.1um
		+/- 10um
		+/- 217m
		ISO 9513, ASTM E83
		2.73kHz
	mm/min	0.001 - 76
	in/min	0.00004 - 3
	um	0.1
	in	0.000004
	um	+/- 10
	mm/min	305
	in/min	12
	um	0.1
	in	0.000004
	um	+/- 10
		208 - 500V
		50/60Hz
		10 - 40 °C
		10% 90%
		10 - 69 °C
		10% 90%
	mm	1010
	in	39.75
	mm	831
	in	32.66
	mm	865
	in	34
	liters	113
	US gal	30